



BUTT HINGES

Rough textured by hand and powdercoated Dull Black for superior durability, these full mortice hinges comply with U.S. standards and Federal Specifications FF-H-111B and FF-H-1166. Screw hole locations conform to U.S. Commercial Standard CS9-65, where applicable. Hinges are available in plain bearing and oilite bearing (ball bearing), and are provided with sheet metal screws: flat head, slotted, powdercoated zinc-steel. Non-removable Pin (NRP) is an option to enhance security. All butt hinges have button tip finials (except the fixed-pin M207), and most may be special ordered with six finial styles (see page S19) – call for availability and pricing.


Squares in photo background are 1/2" x 1/2".



M200



M205



M11



M43

Plain Bearing

ARTICLE #	SIZE	GAUGE	SCREW SIZE
M200	2" x 2"	0.0625	8 x 1"
M205	2-1/2" x 2-1/2"	0.09375	8 x 1"
*M207	2-1/2" x 2-1/2"	0.09375	8 x 1"
M33	3" x 3"	0.092	8 x 1"
M11	3-1/2" x 3-1/2"	0.123	10 x 1"
M12	4" x 4"	0.130	12 x 1-1/4"
M13	4-1/2" x 4-1/2"	0.134	12 x 1-1/4"
M50	5" x 5"	0.146	12 x 1-1/4"


Oilite Bearing (Ball Bearing)

ARTICLE #	SIZE	GAUGE	SCREW SIZE
M41	3-1/2" x 3-1/2"	0.123	10 x 1"
M42	4" x 4"	0.130	12 x 1-1/4"
M43	4-1/2" x 4-1/2"	0.134	12 x 1-1/4"
M44	5" x 5"	0.146	12 x 1-1/4"
M60	6" x 6"	0.156	14 x 1-1/2"

*Note: M207 is a fixed-pin hinge.

PARLIAMENT HINGES

Parliament hinges are designed with a large projection in order to allow a shutter or door to swing back flat against a wall. The hinges are provided with sheet metal screws: flat head, slotted, powdercoated zinc-steel.

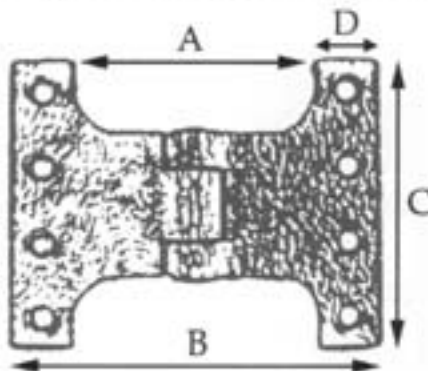

ARTICLE #	DIMENSIONS				SCREW SIZE
	A	B	C	D	
1735 - 3"	3"	4-5/8"	3-9/16"	13/16"	10 x 1"
1735 - 3-1/2"	3-1/2"	5-3/16"	3-3/4"	7/8"	10 x 1"
1735 - 4"	4"	5-3/4"	3-15/16"	7/8"	10 x 1"
1735 - 5"	4-7/8"	7-5/8"	5-1/16"	1-3/8"	12 x 1-1/4"
1735 - 6"	6"	8"	4-7/16"	1"	10 x 1"

Squares in photo background are 1/2" x 1/2".



3"
shown 3-1/2"
4"
5"
6"