

PRIVACY MORTICE LOCKS

Also called Bathroom Locks -- supplied with wood screws and strike plate.
The distance between the centers of the two followers (hubs) is 2-1/4 inches.

ARTICLE #	BACKSET	CASE DIMENSIONS		FOREND	FINISHES	SYMBOL	EXTRAS / OPTIONS	
		HIGH	DEEP					
M333	1-3/4"	4"	2-1/2"	Single 6" x 7/8"	Powder Coat	DB	M4-8 Stronger Follower Spring	
					Nickel Plated	AB		
					Solid Brass	BRS		
Standard Quality								
M337	1-3/4"	3-7/8"	2-1/2"	Double 6" x 1"	Powder Coat	DB	M4-8 Stronger Follower Spring	
					Nickel Plated	AB		
					Solid Brass	BRS		
High Quality								
M334	2-1/4"	<i>DISCONTINUED</i>					DB	M4-8 Stronger Follower Spring
						AB		
						BRS		
M338	2-1/4"	3-7/8"	3"	Double 6" x 1"	Powder Coat	DB	M4-8 Stronger Follower Spring	
					Nickel Plated	AB		
					Solid Brass	BRS		
High Quality								



M338

M337 same style

The M337 and M338 are used with the M30 Thumb Turn Assembly on all knobs and lever handles with backplates available with the "P" feature--see sections "Lever Door Handles" (page 1) and "Door Knobs" (page 6) in this catalogue. "P" or "Privacy" means that backplates have a hole at the proper distance to accommodate the M30 Thumb Turn Assembly below the lever or knob.

When using a lever or knob which has no Privacy hole, the M30 Thumb Turn Assembly may be installed with the M19 Round Turn Rose or M20 Oval Turn Rose to trim the hole. The M20 is required when using these door knobs installed in the diagonal position: 1206, 1207, and 1208.

Our M18 Access Key provides emergency access when the M30 Thumb Turn Assembly is fully installed.

Squares in photo background are 1/2" x 1/2".



M18

Access Key




M19

Round Turn Rose



M20

Oval Turn Rose

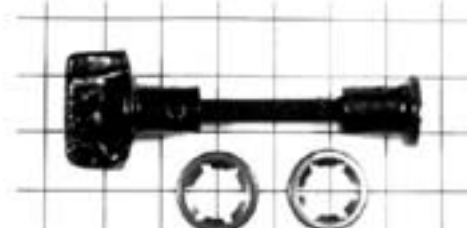

M30

Thumb Turn Assembly

All catalogue contents ©2006 Maguire Iron Corporation. No part of this catalogue may be reproduced in any form, including electronically, without the express written consent of Maguire Iron Corporation, except single pages as part of submittals to clients by architects, designers, or retailers.